

W3280 (34L)
W3242 (50L)


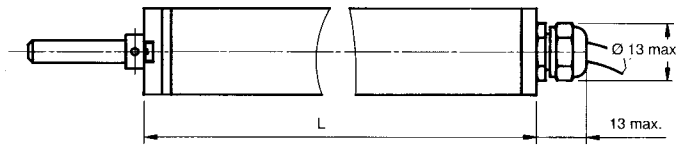


Table 3

Model	L
34L	TET +83,5
50L	TET +70,5

WITH MOVABLE CLAMPS

34L ... W05013

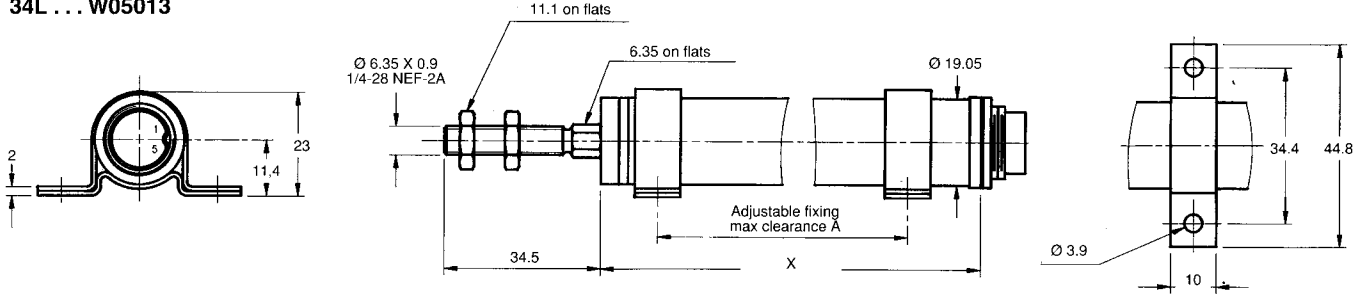

SPRING LOADED SHAFT ; OUTPUT BY SHIELDED CABLE

W1744 (34L)
W1743 (50L)

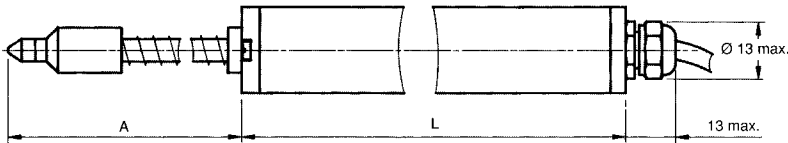


Table 4

	A	L
34 L1	61,4	TET +119,5
34 L2	93,6	
34 L3	125,8	
34 L4	158	
50 L1	70	TET +97,8
50 L2	116	
50 L3	162	
50 L4	208	

DOUBLE BALL JOINT

W3263 (34L)
W1565 (50L)

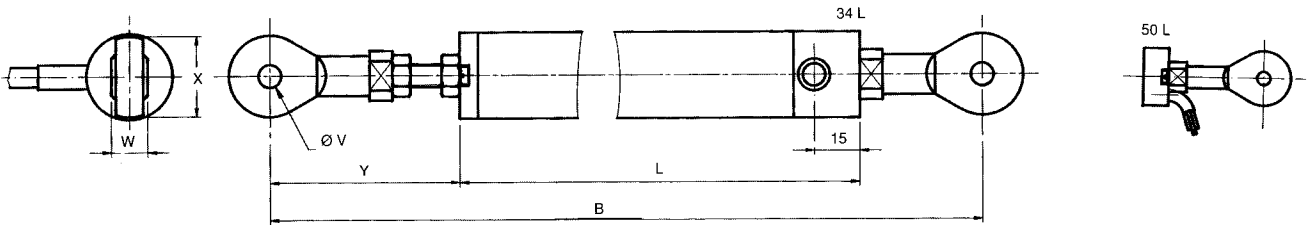


Table 5

MODEL CODE	B	L	ø V	W	X	Y	TET
50 L W1565 L1 to L3 L4 to L6	TET +108,5 TET +133,5	TET + 57,5 TET + 82,5	3 3	6 6	12 12	30 ±2 30 ±2	25 to 75 100 to 150
34 L W3263 L1 to L5 L6 to L10 L11 to L12	TET +151,6 TET +173,6 TET +230	TET + 82,8 TET +104,8 TET +161,2	5 5 5	8 8 8	18 18 18	42 ±2 42 ±2 42 ±2	25 to 125 150 to 250 275 to 300

Dimensions in mm.
General tolerance ± 1 mm.

ORDERING PROCEDURE

